


DRAWING ISO SPLICKIT-Y REV. "G" 06/07/11

Note: Knurl width is standard to tool.

TABLE I

DASH NO.	A	B	C	D	E	NO OF SLOTS
1	.250	.575	2.46	3.22	1.41	2
2	.375	.700	2.85	3.39	1.54	2
3	.500	.825	3.21	3.57	1.66	2
4	.750	1.075	3.97	3.92	1.91	2
5	1.000	1.325	4.72	4.28	2.16	2
6	1.250	1.575	5.47	4.63	2.41	2
7	1.500	1.825	6.22	5.00	2.66	2
8	1.750	2.075	6.97	5.34	2.91	2
9	2.000	2.325	7.78	5.69	3.17	2
10	2.250	2.575	8.47	6.04	3.41	2

STANDARD ISODYNE
SLOT (S)

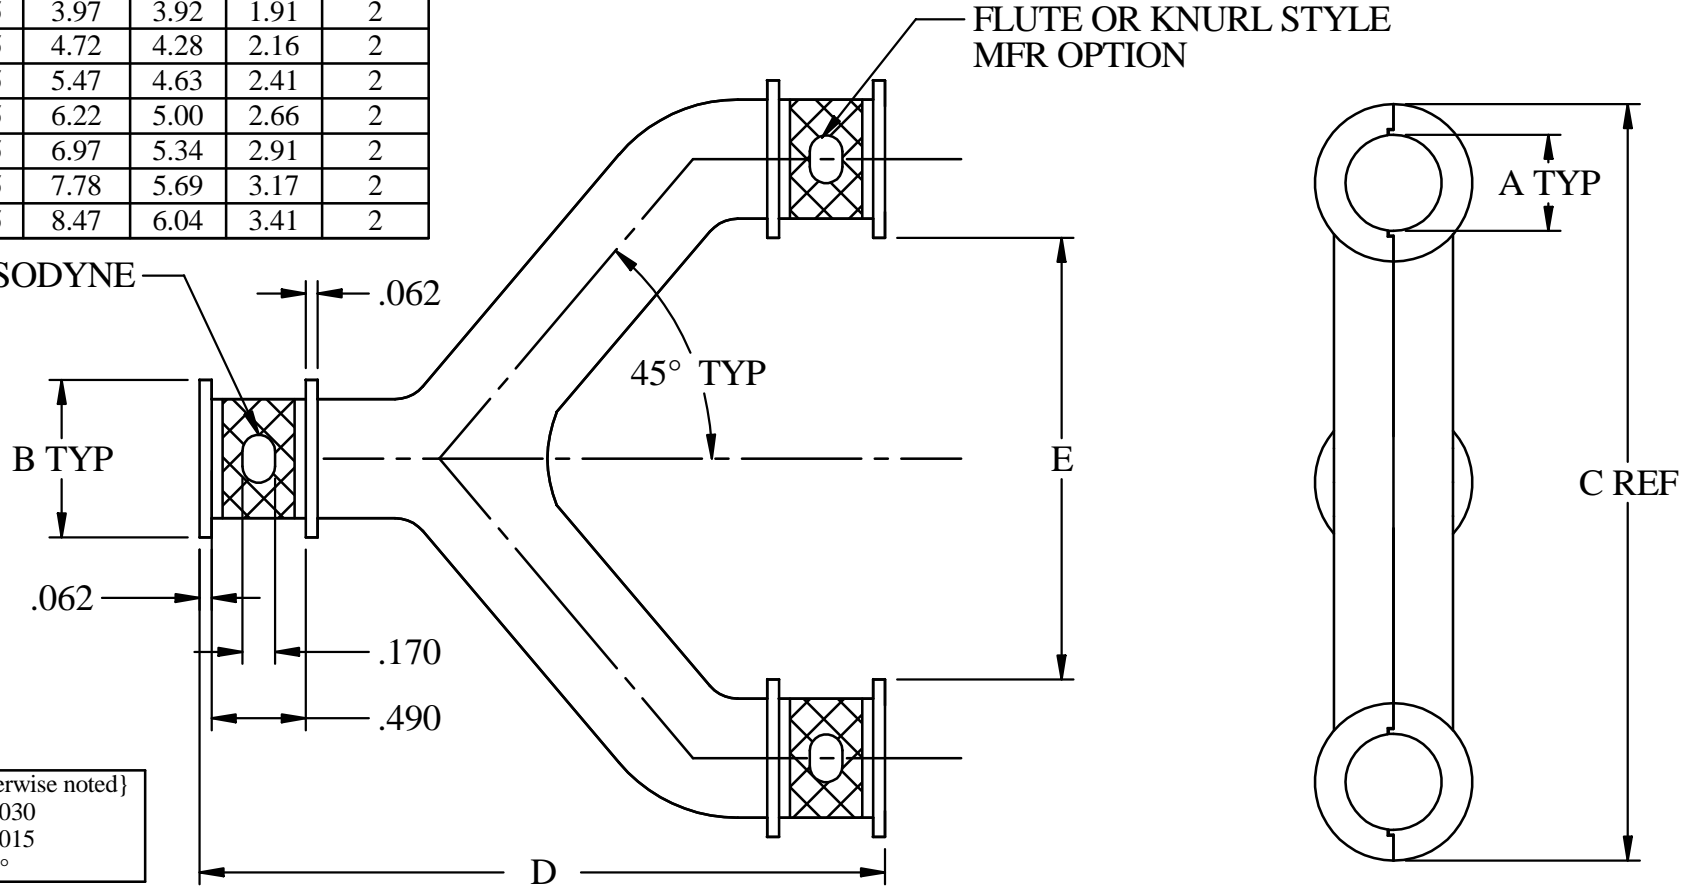

TOLERANCE: {Unless otherwise noted}
 2 PLACE DEC ± .030
 3 PLACE DEC ± .015
 ANGULAR ± 2°



7706 E. OSIE – WICHITA, KS. 67207

U.S. PATENT # 5,769,665

CAGE CODE # 031M6

SPLICE KIT, EMI / RFI
SPRING BAND

NOTE:

1. MATERIAL/FINISH:
NF-CAD/OD OVER ELECTROLESS
NICKEL (500 HR. SALT SPRAY)

PART NUMBER DEVELOPMENT

